



IWEISS

RIGGING EQUIPMENT

Upright Loft Block




The upright loft block can be installed in various orientations, not only upright. The upright loft block requires mounting to structural members to direct lift lines before they are attached to the load that is being supported or lifted.

TECHNICAL DATA

Part # WLB-XXX

- Specs**
- Upright or underhung mounting
 - 8" diameter ASTM Class 30 grey iron or nylon sheave
 - 11 gauge steel side plate
 - 25" 7 gauge formed base angle with hole and slotted pattern
 - Various mounting hardware
 - Idler options are two line nylon sheave each with two ball bearings
 - Sheave pivot bracket available

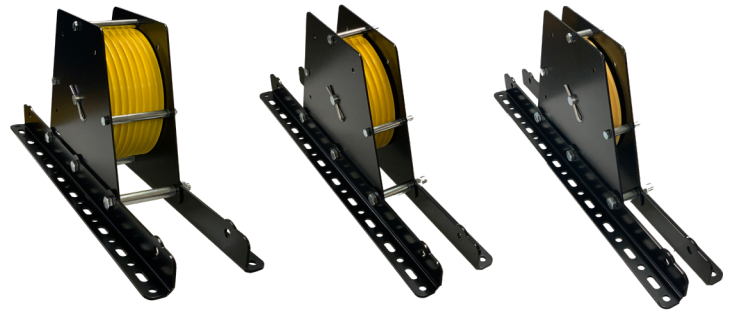

Weiss Loft Block - X Lift Lines X Sheave X Idler

Part#	Lift Lines	Sheave	Bearing	Capacity	Self Weight	Idler
WLB-316IN	(1) 3/16"	8" Nylon	Ball Bearing	525	15	
WLB-251N	(1) 1/4"	8" Nylon	Ball Bearing	875	15	
WLB-251C	(1) 1/4"	8" Cast	Ball Bearing	600	20	
WLB-2512N	(2) 1/4"	8" Nylon	Ball Bearing	875	15	
WLB-254C	(4) 1/4"	8" Cast	Ball Bearing	1300	40	
WLB-254N	(4) 1/4"	8" Nylon	Taper Roller	1575	30	
WLB-258C	(8) 1/4"	8" Cast	Taper Roller	1400	50	
WLB-258N	(8) 1/4"	8" Nylon	Taper Roller	1675	35	
WLB-2512N	(1) 1/4"	12" Nylon	Taper Roller	1000	20	
WLB-3812N	(1) 3/8"	12" Nylon	Taper Roller	1000	20	
WLB-251N-2	(1) 1/4"	8" Nylon	Ball Bearing	875	16	(2) 1/4"
WLB-251N-4	(1) 1/4"	8" Nylon	Ball Bearing	875	17	(4) 1/4"
WLB-251N-6	(1) 1/4"	8" Nylon	Ball Bearing	875	18	(6) 1/4"
WLB-251N-8	(1) 1/4"	8" Nylon	Ball Bearing	875	19	(8) 1/4"

